

# McCoy

A Promise of Happiness

USE & CARE MANUAL  
CUM WARRANTY CARD

CEILING FANS



Please read the instruction manual carefully before use and request to keep it safe and handy.



Dear Customer,

At the outset, thanks for the trust & faith kept in McCoy brand of Ceiling Fan.

This Ceiling Fan is made with utmost care & keeping the best quality standards.

We wish you trouble free operations and would request you to read the instruction manual completely and abide by the same.

Please ensure that the warranty card is filled in completely, signed & stamped/sealed at the place of purchase.

In case of any suggestions / problems, please call our customer care service centre or our call centre for assistance or you can email us too.




Bringing you the best is truly, what drives us day after day!

Thanks once again!

**Canbara Industries Pvt. Ltd.**

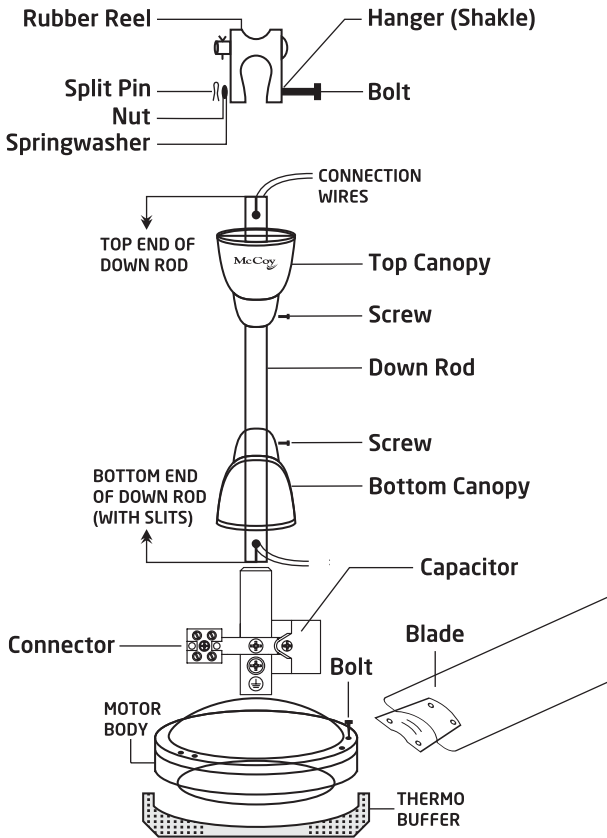


## TECHNICAL SPECIFICATIONS:

			
Model	Carolina / Celestial	Supreme / Stellar	Storm
Voltage	230V ~50Hz	230V ~50Hz	230V ~50Hz
Wattage	75W	75W	72W
RPM	410 (max)	390 (max)	680 (max)
Air Delivery (Cubic mtr/min)	205 / 210	212 / 200	160
Sweep Size (mm)	1200	1200	900
Double Ball Bearing	✓	✓	✓
Color Available	Brown/Ivory/white	Brown/Ivory/white	Brown/Ivory/white

# FAN ASSEMBLY DIAGRAM

---



.....

## **IMPORTANT**

- The diagrams of fan are just the general representation of ceiling fan and not the actual fan.
- Read the instructions carefully. Open the packing and arrange the fan parts as per the diagram.
- Assemble & install fan as per assembly, wiring diagrams and written instructions.
- Check the assembled fan regulator, ensure proper installation before switching ON the fan.

## **ASSEMBLY & INSTALLATION : FAN**

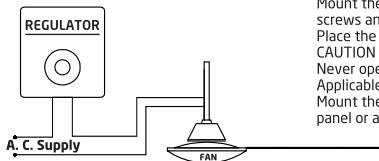
- 1 Place the motor on the thermo buffer to avoid surface scratches.
- 2 Pass the connection wires through slit holes at the bottom end of down rod and remove them from the top end of down rod.
- 3 Insert the bottom of down rod (with slits) on spindle and insert bolt. Place the spring washer and fully tighten nut insert the split pin in the small hole on the bolt end and open the ends, so that it does not fall off. The assembly of bolt, spring washer, nut, split pin is separately packed with hanger assembly.
- 4 Connect the wires to connection block.
- 5 Insert the bottom canopy from top end of down rod and place it in position. Ensure minimum 3 to 4 mm gap between condenser cover and motor body and tighten the screw which is provided on bottom canopy.
- 6 Insert the canopy from top end of the down rod.
- 7 Fix the blade with the bolt already provided on the motor body.
- 8 Remove the split pin, nut, spring washer bolt, at the bottom end of hanger Assembly.
- 9 Place the hanger assembly in ceiling hook in such a way that rubber reel rests on the ceiling hook.
- 10 Insert the top of down rod between the steel clamps of hanger assembly. Match the holes with holes in down rod. Insert bolt. Place spring washer and fully tighten nut. Insert the split pin in the small hole on the bolt end and open the ends so that it does not fall off.
- 11 Connect the regulator in the series with fan.

## **PRECAUTIONS**

- The plane of the fan blades should be 2.4 and 2.7 metres from the floor.
  - Do not mix the blades of one set with another set as these blades are balanced and packed as a set for efficient air delivery.
- .....

- For ball bearings, use grease of Bharat Petroleum MP2 or Indian Oil Servogen 3 and for bush bearings 3-in-1 or equivalent lubricating oil.

## INSTALLATION OF REGULATOR



Applicable for Resistance Regulator.  
Mount the regulator base plate on switch board with screws and nuts.  
Place the cover in position & tighten the Two Screws.  
**CAUTION**  
Never open or try to loosen screws on the base plate.  
Applicable for the Electronic Regulator.  
Mount the regulator on a suitable modular switch panel or a separate panel.

## WARRANTY:

This product is warranted for 2 years from the date of sale against any manufacturing defect, provided the defective product or the component is delivered/return to us or to a nearest Dealer/Distributor/Wholesaler, freight paid. Our liability shall, however, be to the maximum of the cost of rectifying the defects of the price paid for the product (whichever is less) and we shall not be held liable for any other indirect or consequential damage.

## TERMS AND CONDITIONS:

- This warranty is extended covering manufacturing defects and or defects in workmanship
- Warranty subject to 2 years from date of purchase
- Warranty is valid only to the first purchase only
- Any such defects will be attended by service repair and replacement of defective part alone
- The product should be service / repaired only by recommended McCoy authorised service centre
- The bill and warranty card needs to be produced along with the product for service repair
- The warranty card has to carry the dealers stamp and be duly filled up
- Product is meant only for household only
- The transactions are subject to High Court jurisdiction Mumbai
- This warranty is subject to serial number verifications.

This warranty is not valid if:

- The fault of damages caused due to the customer's ignorance, mishandling, negligence, in correct connection, misapplication, voltage fluctuation, accident or general wear and tear.
- The product is not purchased from an authorised McCoy Dealer/Retailer.
- The product is opened or handled by any unauthorized person.
- The serial number of the product is missing, deleted, defaced or altered.
- The product or the component is not properly packed, while returning to avoid damage in transit.



**2** YEARS  
PRODUCT  
WARRANTY

Bill No. \_\_\_\_\_

Date \_\_\_\_\_

Name of the Purchaser. \_\_\_\_\_


Address \_\_\_\_\_

Phone No. \_\_\_\_\_

Name & Address of the Dealer with Stamp

Signature of Dealer

Customer Care: 022 28530234/35/36/37  
Email: [customercare@mccoyindia.in](mailto:customercare@mccoyindia.in)  
Whatsapp Helpline: 8291270276

 Toll Free No.: 1800 22 0276

This warranty is not valid if above information is not duly filled in.



Marketed by:

**CANBARA INDUSTRIES PVT. LTD.**

SSAS Complex, Lekhraj Devraj Industrial Estate,  
Kherani Road, Sakinaka, Andheri (E), Mumbai - 400 072, INDIA.

Follow us @ McCoy Appliances



[www.mccoyindia.in](http://www.mccoyindia.in)